

nShield® Connect/5c Physical Security Checklist




Metal lid

Check that the metal lid remains flush with the nShield Connect/5c chassis.


Tamper event

Opening the lid activates a tamper event. The next time you power up the Connect/5c with the lid closed, it is set to factory state and any key data stored on the unit is destroyed.

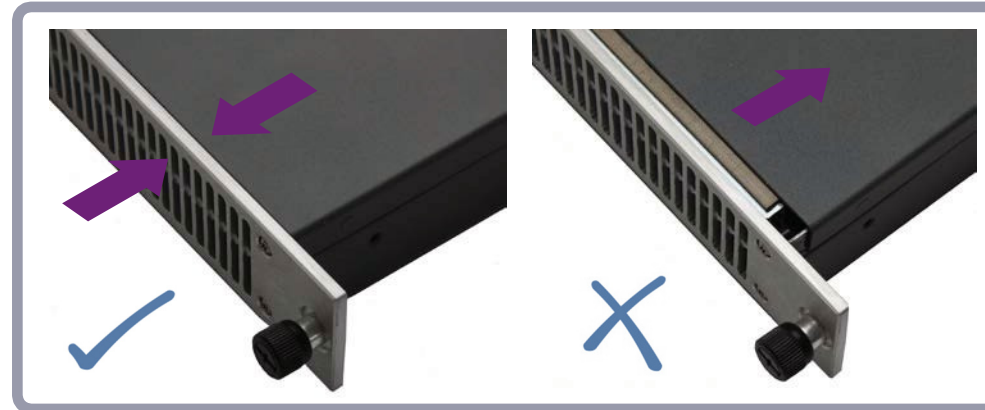

Vents

Check that there are no signs of physical damage to the vents, including attempts to insert objects into the vents.

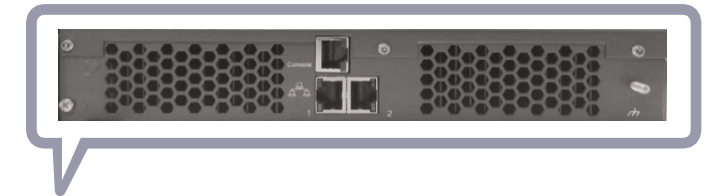

Surfaces

Check all surfaces — the top, bottom, and sides of the nShield Connect/5c — for signs of physical damage.



Security seal

Check that the physical security seal is authentic and intact.

Look for the holographic foil bearing the Entrust logo. Look for cuts, tears, and voiding.



Product documentation



<https://nshielddocs.entrust.com>